


IPLED Modules



This series adopts the high-stability chips as the light sources from the internationally famous factories Lumileds, Cree etc, is of perfect quality with competitive prices, very stable, with large viewing angle, slow light-weakening and free maintenance, is widely used in channel letters, signs, light boxes, landscapes and stage decorations etc.

LED Color	Led type	Lumen	Dimension	Power per Module	Qty per meter	Angle	Wave length
White	5050 SMD	30	78x15x5	0.72w - 12vdc	10 PCS	≥140°	5500K ±5%

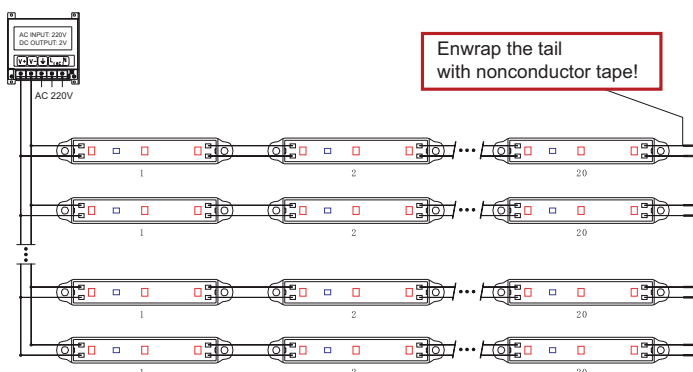

5 meter long master wires diameters		
Power (W)	Current (A)	Wire Diameters (mm ²)
12	1	0.75
24	2	1
48	4	1.5
72	6	2
100	9	2.5
Arrange another master wire if one master wire load is over 100W		

